



Accessing Nokia 3100b DC Input

Written By: Sterling Fuentes



INTRODUCTION

The DC input of the Nokia 3100b is where the cell phone's charger plugs in to. This guide shows you how to access the input.



TOOLS:

- [T6 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — battery



- Make sure your phone is turned off.

Step 2



- Press the button on the back of the phone and slide the back panel off.
- Remove the battery by pulling it from the phone.

Step 3 — Removing Nokia 3100b SIM Card



- Note the small metal frame that hold the SIM card into place.
- Gently pull back the tab and lift open the frame.

Step 4



- Retrieve your SIM card.

Step 5 — Accessing Nokia 3100b DC Input



- Separate the front cover from the base.

Step 6




- Using a T6 Torx screwdriver, remove the screws in the order of the colors of the rainbow.

Step 7




- Separate the screen assembly from the base.

Step 8

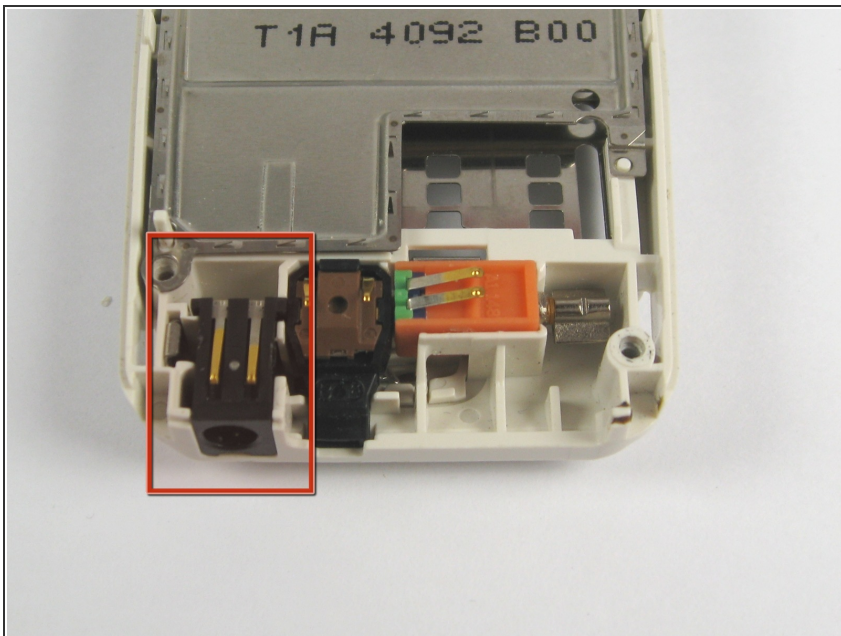

- Note where the DC input is.

Step 9

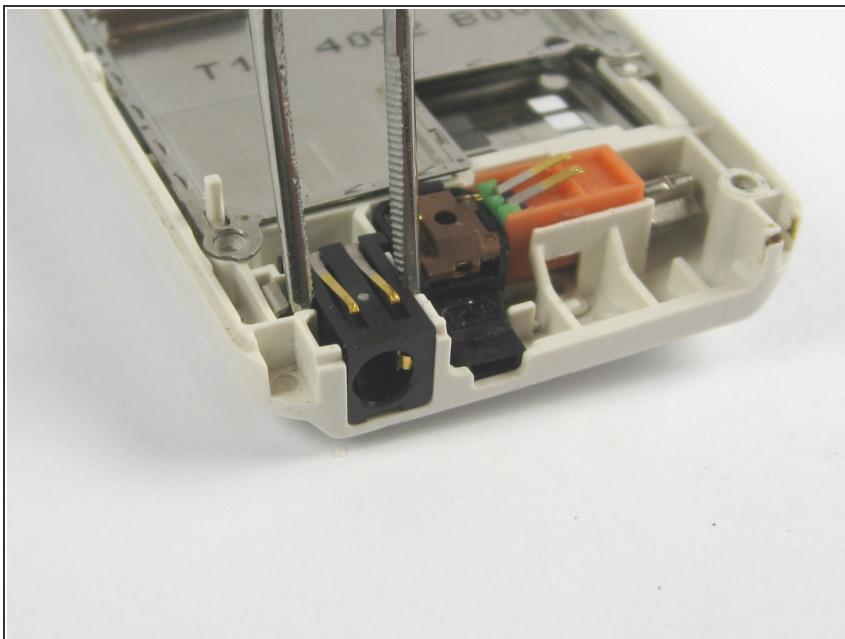

- Use a pair of tweezers to remove the DC input from the base.

Step 10



- The DC input is now removed. Replace as necessary.

To reassemble your device, follow these instructions in reverse order.